

# EN5040-T High-power Repeater

www.boschsecurity.com



**BOSCH**  
Invented for life



- ▶ Easy installation; no wires or programming required
- ▶ Supervision for low battery, loss of line power, tamper, and jams
- ▶ Expanded coverage by utilizing multiple repeaters
- ▶ Self-configuring
- ▶ Sophisticated signal management

The line-powered 900 MHz EN5040-T High-power Repeater receives, decodes, and re-transmits signals from Inovonics EchoStream platform transmitters. This technology uses diversity reception and advanced signal processing to reduce dead spots in transmission areas. Each repeater acts as a range expander for any transmission, allowing the installation to scale from smaller commercial sites to large campuses with several buildings. Each repeater includes an on-board, state-of-the-art lithium-ion back-up battery. The EN5040-T High-power Repeater includes a transformer.

## System overview

### Powered by Inovonics


The Inovonics EchoStream platform, powered by Inovonics wireless mesh network technology, ensures superior range, reliability, and scalability for commercial applications. Using a wide range of transmitters and repeaters, this proven technology provides flexibility and performance to meet the most stringent requirements. This exclusive protocol is available only on Inovonics EchoStream products.

### Wireless 900 MHz Band

The Inovonics EchoStream platform sends redundant information on several multi-frequency channels within the FCC Part 15 900 MHz band, providing superior

range and reliability. In comparison, systems that use a single frequency technology can only send information on one narrow band channel. Any interference within the band can cause missed signals. With wireless registration, it is easy to add this technology to any application.

### Repeater Network

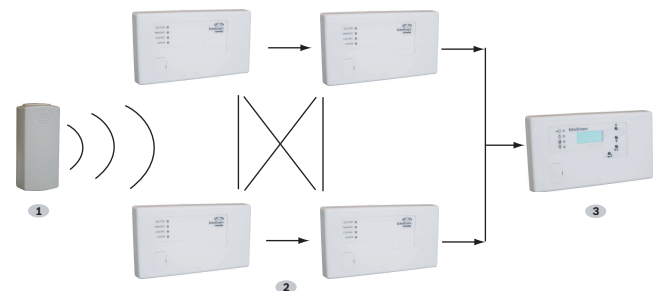

Use multiple repeaters to create a mesh network.

- 1 The transmitter sends a signal.
- 2 Repeaters receive the signal and re-broadcast it, allowing the user to extend the range of the RF system to cover large areas such as installations in campuses, sites with detached buildings, or multiple story complexes.
- 3 The receiver hears the signal from the repeaters and processes accordingly.

### Functions

#### Installation

The installation is as easy as mounting the repeater and plugging it in. No wires or programming are required, although registration is recommended for a fully supervised system.

#### Supervision and Expansion

The repeater supervises for low battery, loss of line power, case tamper, and jam detection. An on-board lithium-ion battery:

- Provides backup without additional expense
- Offers up to 24 hours of continuous operation when line power is unavailable
- Reports power loss when programmed or supervised to a slave receiver

Installers can employ multiple repeaters in a micro-cellular network, providing coverage for applications including large campuses with multiple-story buildings.

#### Signal Management

The repeater incorporates sophisticated signal management, preventing ping-pong messages and maximizing reliability.

### Certifications and approvals

Inovonics Wireless Corporation also holds the following approvals:

FCC Conforms to FCC Part 15 regulations

### Installation/configuration notes

#### Compatibility Information

The EN5040-T High-power Repeater is compatible with the following products:

#### Receivers

EN4200	Serial Receiver
EN4204R	LED Receiver

#### Transmitters

EN1210	Universal Transmitter (Single-input)
EN1210EOL	Universal Transmitter with EOL Resistor
EN1210SK	Survey Transmitter
EN1210W	Door-Window Transmitter with Reed Switch
EN1215EOL	Universal Transmitter with Wall Tamper and EOL Resistor

EN1215WEOL	Door-Window Transmitter with Wall Tamper, Reed Switch, and EOL Resistor
EN1223D	Water-resistant Pendant Transmitter (Double-button)
EN1223S	Water-resistant Pendant Transmitter (Single-button)
EN1223SK	Survey Pendant Transmitter
EN1233D	Necklace Pendant Transmitter (Double-button)
EN1233S	Necklace Pendant Transmitter (Single-button)
EN1235D	Beltclip Pendant Transmitter (Double-button)
EN1235S	Beltclip Pendant Transmitter (Single-button)
EN1235DF	Fixed-location Transmitter (Double-button)
EN1235SF	Fixed-location Transmitter (Double-button)
EN1242	Smoke Detector-Transmitter
EN1247	Glass-break Sensor Transmitter
EN1249	Billtrap Transmitter
EN1260	PIR Motion Sensor-Transmitter (Commercial and High-end Domestic Applications)
EN1261HT	PIR Motion Sensor-Transmitter (High-traffic Areas)
EN1262	PIR Motion Sensor-Transmitter (Residential and Low-traffic Commercial Applications)
EN1265	PIR Motion Sensor-Transmitter (Ceiling-mount Applications)

### Parts included

Quant.	Component
1	EN5040-T Repeater
1	Transformer
1	Backup battery assembly (BAT850)
1	Hardware pack
1	Literature – Installation and Operation Manual

### Technical specifications

#### Electrical

Power Requirements:	14 VAC, 250 mA
Backup Battery	
• Capacity:	3.7 VDC nominal, 2.45 Ah
• Life:	24 hours typical
• Type:	Rechargeable lithium-ion battery

**Environmental**

Relative Humidity:	Up to 90%, non-condensing
Temperature (operating):	0°C to +60 C (+32°F to +140°F)

**Mechanical**

Material:	ABS
Closure:	Latching with optional screws for high security installations
Dimensions:	165 mm x 89 mm x 25 mm (6.5 in. x 3.5 in. x 1 in.)
Weight:	204 g (7.14 oz)

**Reception/Transmission Characteristics**

Frequency:	902 MHz to 928 MHz
------------	--------------------

**Trademarks**

Trademark names are used throughout this document. In most cases, these designations are claimed as trademarks or registered trademarks in one or more countries by their respective owners. Rather than placing a trademark symbol in every occurrence of a trademark name, Bosch Security Systems, Inc. uses the names only in an editorial fashion and to the benefit of the trademark owner with no intention of infringing the trademark.

Inovonics is a trademark of Inovonics Wireless Corporation.

**Ordering information**

**EN5040-T High-power Repeater**

Line-powered 900MHz EN5040-T High-power Repeater  
Order number **EN5040-T**

**Represented by:**

**Americas:**

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

**China:**

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

**America Latina:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
latam.boschsecurity@bosch.com  
www.boschsecurity.com