

# FLM-420-O8I2-S Octo-output interface module, 2-input



- ▶ Eight individually switchable semi-conductor outputs
- ▶ Outputs are electrically isolated from LSN loop and short-circuit proof
- ▶ Max. switchable current per output 700 mA
- ▶ Individually selectable monitoring functions (EOL or contact) for the two inputs each
- ▶ Maintains LSN loop functions in the event of wire interruption or short-circuit thanks to two integrated isolators
- ▶ Easy wiring thanks to pluggable terminal blocks


The FLM-420-O8I2-S Octo-output Interface Module is fitted with eight outputs to control external devices and with two monitored inputs. It is a 2-wire LSN element. When connected to the fire panels FPA-5000 and FPA-1200, the interface module offers the enhanced functionality of LSN improved technology.

## System overview

## Functions

### Semi-conductor outputs

The outputs can be switched independently. They are electrically isolated from the LSN loop and protected against short circuits.

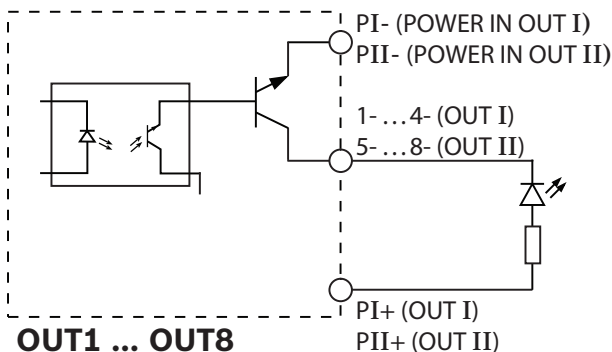

OUT1 ... OUT8  
Functionality of the semi-conductor outputs

### Output power supply

The power supply for connected loads can be selected individually for blocs of four outputs each:

- Auxiliary power supply (AUX) from the fire panel
- External power supply units.

### Monitoring functions of the inputs

The FLM-420-O8I2-S Octo-output Interface Module provides two monitoring functions:


1. Monitoring of a line by an EOL resistor
  2. Monitoring of a potential-free contact
- The monitoring functions of the two inputs can be selected individually by setting the corresponding addresses.

### Line monitoring with EOL resistor

The monitoring with EOL resistor can be activated individually for each of the inputs. The EOL resistor has a standard resistance of 3.9 kΩ.

The interface module detects

- Standby
- Triggering in the event of a short circuit
- Triggering in the event of line interruption.



Position	Description
----------	-------------


$R_{\Sigma}$  Overall line resistance with  $R_{\Sigma} = R_{L/2} + R_{L/2} + R_{EOL}$

$R_{L/2}$  Line resistance

The following line conditions will be reliably detected if the overall line resistance is within the specified range:

Line condition	Overall line resistance $R_{\Sigma}$
Standby	1500 $\Omega$ to 5500 $\Omega$
Short circuit	< 800 $\Omega$
Interruption	> 85000 $\Omega$

**Contact monitoring**



The interface module evaluates the operating conditions "open" or "closed". The normal operating condition can be programmed for each input. Contact monitoring has a pulse intensity of 8 mA.

**Address switches**

The addresses of the interface modules are set by rotary switches.

In case of connection to the fire panels FPA-5000 and FPA-1200 (improved version LSN mode), the operator can select automatic or manual addressing with or without auto-detection. In LSN mode classic, connection to the fire panels BZ 500 LSN, UEZ 2000 LSN and UGM 2020 is possible.

Address	Mode
0 0 0	Loop/stub in improved version LSN mode with automatic addressing (T-taps not possible)
0 0 1 ... 2 5 4	Loop/stub/T-taps in improved version LSN mode with manual addressing
CL 0 0	Loop/stub in LSN mode classic

**LSN features**

Integrated isolators ensure that function is maintained in the event of a short circuit or line interruption in the LSN loop. A fault indication is sent to the fire panel.

**Features of LSN improved version**

The interface modules of the 420 series have all features of the improved LSN technology:

- Flexible network structures including T-tapping without additional elements
- Up to 254 LSN improved elements per loop or stub line
- Unshielded cable can be used

- Downwards compatible with existing LSN systems and control panels.


**Regulatory information**

Complies with

- EN 54-17: 2005
- EN 54-18: 2005 + AC: 2007

Region	Regulatory compliance/quality marks	
Morocco	CMIM	FLM-420-O8I2-S
Germany	VdS	G 209147 FLM-420-O8I2-S
Europe	CE	FLM-420-O8I2-S
	CPD	0786-CPD20795 FLM-420-O8I2-S
Hungary	TMT	TMT-36/2010 szamu FLM-420-O8I2-S, FLM-420-O111-E, FLM-420-O111-D, FLM-420-RLE-S
Ukraine	MOE	UA1.016.0070230-11 FLM-420-O8I2-S

**Installation/configuration notes**

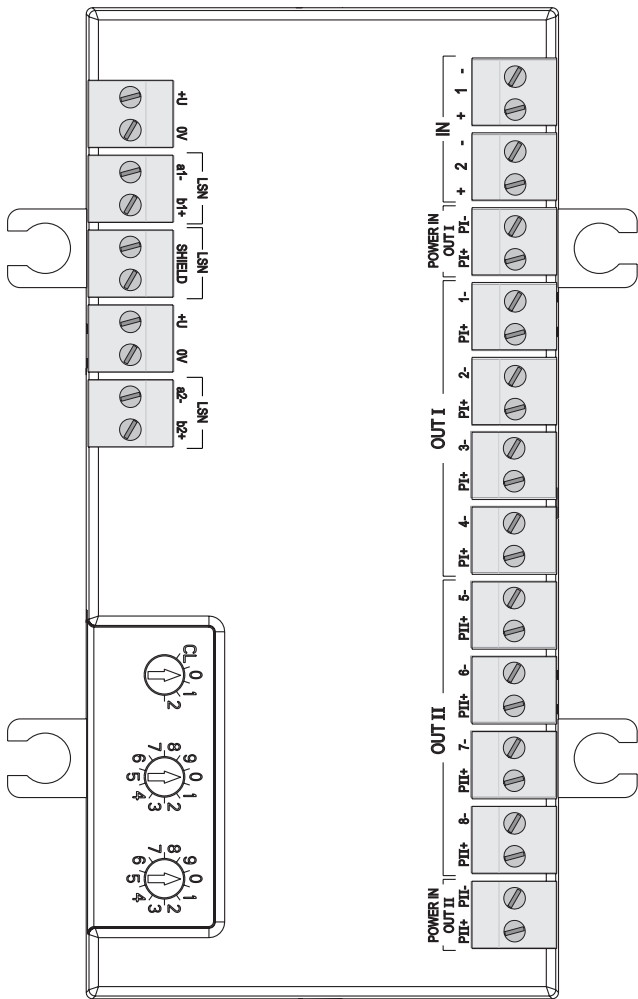

POWER IN OUT I	PI+   PI-	Power supply output 1 to 4
IN	+   2   -	Input 2
	+   1   -	Input 1

- Can be connected to the fire panels FPA-5000 and FPA-1200 and the classic LSN control panels BZ 500 LSN, UEZ 2000 LSN and UGM 2020.
- Programming is done with the programming software of the fire panel.
- The LSN connection is established by the two wires of the LSN line.
- The outputs OUT I/1- to 4- and OUT II/5- to 8- are switched against the negative potential of the interface module (POWER IN OUT I/ PI- and POWER IN OUT II/ PII-). The positive potential for OUT I/PI+ and OUT II/PII+ is either supplied by the auxiliary power (AUX) from the fire panel or by one or two external power supply units or a combination of both. OUT I/PI+ and POWER IN OUT I/PI+ as well as OUT II/PII+ and POWER IN OUT II/PII+ are linked internally.
- External power supplies must be free-of-ground.
- The maximum switchable voltage of the semi-conductor outputs is 30 V DC. The maximum switchable current is 700 mA for each of the outputs (depending on the external power supply).
- The activation of the inputs IN 1 and 2 has to be carried out electrically isolated from LSN (e. g. with relay contact, pushbutton, etc.).
- The inputs must have a minimum activation time of 3.2 s.
- The maximum cable length of all inputs connected to the loop or stub is 500 m in total. Additionally, all outputs which are not electrically isolated from LSN must be included in the total line length calculation (e.g. peripherals connected via C points). With UEZ 2000 LSN and UGM 2020, the limitation to 500 m applies to each Network Processing Converter (NVU).
- The interface module has terminal blocks to allow a second pair of wires to be looped through to an auxiliary power supply.
- The cables are fed through rubber bushings or PG cable glands
- The pluggable terminal blocks allow for an easy wiring even if the interface module is built in.
- Use included spacers when mounting on uneven surface.
- For a fire system operation according to EN 54-2, the interface modules used for the activation of fire protection equipment and whose outputs are not monitored, must be installed directly next to or within the device which shall be activated.

Description	Connection	Connection
	+U 0V	Auxiliary power supply (support points to loop through)
LSN	a1-   b1+	LSN incoming
LSN	SHIELD	Cable shielding (if available)
	+U 0V	Auxiliary power supply (support points to loop through)
LSN	a2-   b2+	LSN outgoing
POWER IN OUT II	PII+   PII-	Power supply output 5 to 8
OUT II	PII+   8-	Reference potential (PII+),
	...	switched negative potential out-
	PII+   5-	put 5 to 8
OUT I	PI+   4-	Reference potential (PI+),
	...	switched negative potential out-
	PI+   1-	put 1 to 4

## Parts included

Quantity	Component
1	Octo-output Interface Module, in housing for surface mounting

## Technical specifications

### Electrical

LSN	
• LSN input voltage	15 V DC to 33 V DC
• Max. current consumption from LSN	5.5 mA
Outputs	8, independent
• Max. switchable voltage of semi-conductor outputs	30 V DC
• Max. switchable output current	700 mA per output (depending on external power supply)
• External power supply	5 V DC to 30 V DC
Inputs	2, independent
Line monitoring with EOL	
• EOL resistor	Nominal 3.9 kΩ
• Overall line resistance $R_{\Sigma}$ with $R_{\Sigma} = R_{L/1} + R_{L/2} + R_{EOL}$	<ul style="list-style-type: none"> <li>Standby: 1500 Ω to 5500 Ω</li> <li>Short circuit: &lt; 800 Ω</li> <li>Line interruption: &gt; 85000 Ω</li> </ul>
Contact monitoring	
• Max. current strength (current pulse)	8 mA
Minimum activation time of the inputs IN 1...2	3.2 s

### Mechanical

Connections	30 screw terminals
Permissible wire diameter	0.6 mm <sup>2</sup> to 3.3 mm <sup>2</sup>
Address setting	3 rotary switches

Material	ABS + PC-FR
Housing color	Signal white, RAL 9003
Dimensions	Approx. 140 x 200 x 48 mm (W x H x D)
Weight (without/with packing)	Approx. 480 g /800 g

### Environmental conditions

Permissible operating temperature	-20 °C to +65 °C
Permissible storage temperature	-25 °C to +80 °C
Permissible rel. humidity	< 96% (non-condensing)
Classes of equipment as per IEC 60950	Class III equipment
Protection class as per IEC 60529	IP 54

### System limiting values

Maximum cable length of all inputs and outputs which are connected to the loop or stub and not electrically isolated from LSN	500 m in total
---	----------------

## Ordering information

**FLM-420-O8I2-S Octo-output interface module, 2-input**  
in housing for surface mounting  
Order number **FLM-420-O8I2-S | F.01U.033.255**

#### Represented by:

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: +31 40 2577 284  
www.boschsecurity.com/xc/en/contact/  
www.boschsecurity.com

**Germany:**  
Bosch Sicherheitssysteme GmbH  
Robert-Bosch-Ring 5  
85630 Grasbrunn  
Tel.: +49 (0)89 6290 0  
Fax: +49 (0)89 6290 1020  
de.securitysystems@bosch.com  
www.boschsecurity.com

**North America:**  
Bosch Security Systems, LLC  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
onlinehelp@us.bosch.com  
www.boschsecurity.com

**Asia-Pacific:**  
Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
www.boschsecurity.com/xc/en/contact/  
www.boschsecurity.com