

DS840LSN TriTech PIR/MW Dual Motion Detector

www.boschsecurity.com



BOSCH
Invented for life



- ▶ Twin-wire connection to local security network (LSN)
- ▶ Microwave and passive infrared (PIR) monitoring every 12 hours
- ▶ Pet immunity
- ▶ Tamper switch
- ▶ Temperature compensation

The products in the DS840LSN series are wall-mounted passive infrared (PIR) and microwave motion detectors. When both monitoring fields are activated, passive infrared and microwave technology triggers an alarm.

Functions

Monitoring security through microwave and PIR technology

- **PIR and microwave:** The detector carries out an internal self test every 12 hours to check the microwave and PIR systems. If there is a microwave or PIR system failure, the detector carries out another test. If the second test cannot be successfully completed on both systems, the light-emitting diode (LED) flashes red to indicate that the detector needs to be replaced. The detector transmits a fault signal to the control panel via the LSN bus.
- **Factory default setting:** The PIR technology ensures detection in the event of microwave technology failure.

Configuration

Configure the detector using the software in the corresponding LSN control panel.

PIR sensitivity settings

Select one of the following sensitivity settings using the software in the LSN control panel:

Standard sensitivity: Minimizes false alarms and is suitable for extreme temperatures.

Intermediate sensitivity: Suitable for instances where an intruder only moves through a small section of the protected area. Normal surroundings are tolerated on this setting. Do not use this setting in areas with pets or animals.

False alarm immunity

The detector does not recognize the following animals:

- a dog up to 45 kg
- small rodents, e.g. rats
- up to 10 cats
- flying birds

Displays

The detector has a visible external LED, which lights up in red, green, and yellow. Various color and flashing combinations are used to provide status information such as: walk test deactivated, walk test activated, power supply turned on, dual alarm, microwave alarm, PIR alarm, and no activity.

Signals

The detector transmits alarm, tampering, and fault information via the LSN bus.

Temperature compensation

The PIR sensitivity is increased or lowered depending on the ambient temperature in order to recognize human body heat and suppress false alarms.

Certifications and approvals

Region	Regulatory compliance/quality marks	
Germany	VdS	G106517 [DS840LSN]
	VdS	[DS840LSN-F5]

Installation/configuration notes

Installation notes


The installation height is between 2.0 m and 2.6 m.



Notice


When using the B335 or B338 mount, the range can be impaired and the dead zones can be expanded.

The detector can react in its monitoring area to movements or swift changes in temperature. Position the detector away from direct sunlight, windows, ceiling fans, and busy roads.

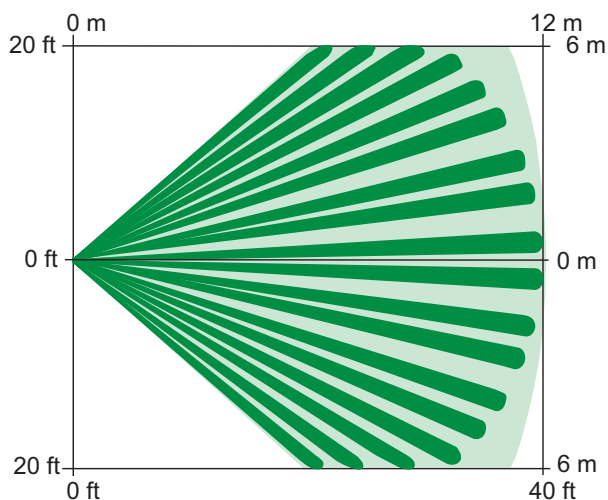

Top view

Monitoring area: 12 m x 12 m

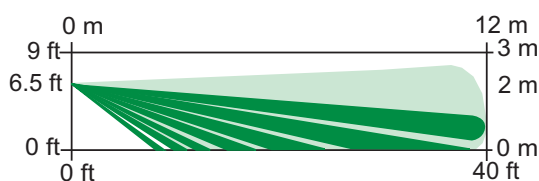

Side view

Monitoring area: 12 m x 12 m

Technical specifications

Housing

Dimensions:	10.8 cm x 7 cm x 4.6 cm
Material:	High-impact ABS plastic

Environmental conditions

Storage and operating temperature:	-20 °C to +55 °C
------------------------------------	------------------

Installation notes

Internal lens adjustment:	+2° to -18° vertically
---------------------------	------------------------

Microwave frequency

DS840LSN:	10.525 GHz
DS840LSN-F5:	9.35 GHz

Power requirements

LSN current consumption:	4.0 mA (MAP power index 27)
LSN power supply:	33 V maximum
Standby power supply	No internal emergency battery available. Requires 4 mAh per hour in standby mode.

Trademarks

TriTech is a registered trademark of Bosch Security Systems in the USA.

Ordering information

DS840LSN Motion detector, pet friendly LSN

Operates at 10.525 GHz. Monitoring area of 12 m x 12 m, twin-wire connection to LSN, microwave and PIR monitoring every 12 hours, pet immunity, and tamper switch.

Order number **DS840LSN**

DS840LSN-C Detector (10.588 GHz)

Operates at 10.588 GHz. Monitoring area of 12 m x 12 m, twin-wire connection to LSN, microwave and PIR monitoring every 12 hours, pet immunity, and tamper switch.

Order number **DS840LSN-C**

DS840LSN-F5 Motion detector pet friendly LSN 9.35GHz

Operates at 9.35 GHz. Monitoring area of 12 m x 12 m, twin-wire connection to LSN, microwave and PIR monitoring every 12 hours, pet immunity, and tamper switch.

Order number **DS840LSN-F5**

Accessories

B335-3 Mounting bracket, swivel, low profile

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

B338 Mounting bracket, ceiling, universal

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

Represented by:

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
emea.securitysystems@bosch.com
emea.boschsecurity.com

Germany:

Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.boschsecurity.com

North America:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.us

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia