

# LB10-UC06-FL Cabinet speaker 6W flat white

www.boschsecurity.com



**BOSCH**  
Invented for life



- ▶ Good speech intelligibility and background music reproduction
- ▶ ABS construction
- ▶ Mounting brackets for wall or ceiling mounting
- ▶ Complies with international installation and safety regulations

The LB10-UC06-FL is a 6 W, general-purpose, cost-effective loudspeaker for indoor use. Keyholes at the rear are provided for quick and easy wall mounting. Two brackets, that can be fixed to the rear panel, are also provided as an option for quick and easy mounting on a wall or ceiling applications.

## Functions

The enclosure is made of robust, solid ABS (acrylonitrile butadiene styrene).

## Certifications and approvals

### Quality assurance

All Bosch loudspeakers are designed to withstand operating at their rated power for 100 hours in accordance with IEC 60268-5 Power Handling Capacity (PHC) standards. Bosch has also developed the Simulated Acoustical Feedback Exposure (SAFE) test to demonstrate that they can withstand two times their rated power for short durations. This ensures improved reliability under extreme conditions, leading

to higher customer satisfaction, longer operating life, and lessens the chance of failure or performance deterioration.

Safety

acc. to EN 62368-1


## Installation/configuration notes

Three keyholes in the rear panel provide easy and quick wall mounting.


Two mounting brackets are also provided as an options for easy and quick installation to wall and ceiling applications.

A convenient, easy-to-use, four-pole screw terminal block is on the rear panel for on-site wiring. This terminal block has provision for power tapping on the 100 V, matching transformer in the cabinet. It allows selection of nominal full-power, half-power or quarter-power radiation (in 3 dB steps).


2 | LB10-UC06-FL Cabinet speaker 6W flat white

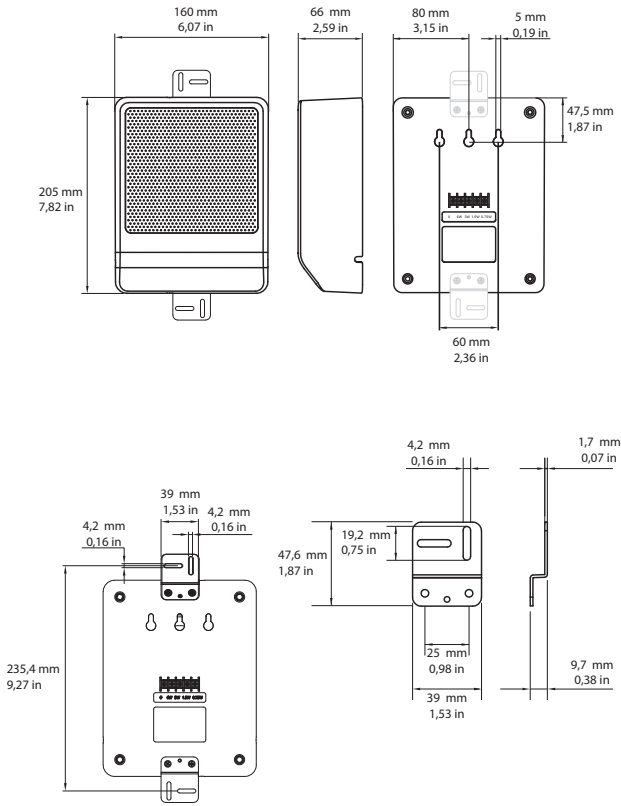

LB10-UC06-Fx dimensions

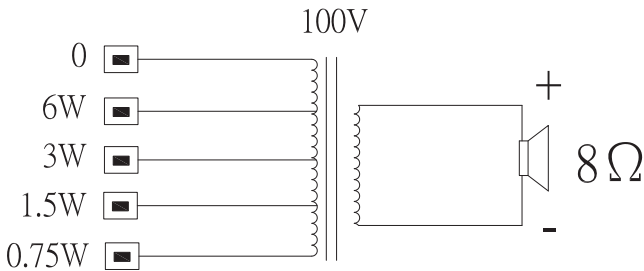


Circuit diagram

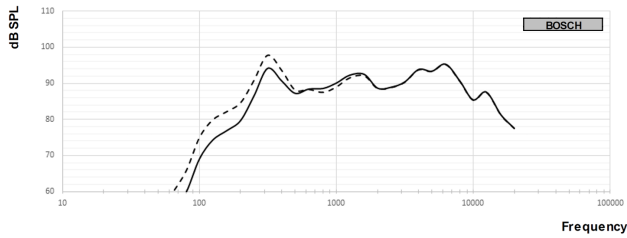


Frequency response

— Full-space measurement result  
- - - Half-space measurement result

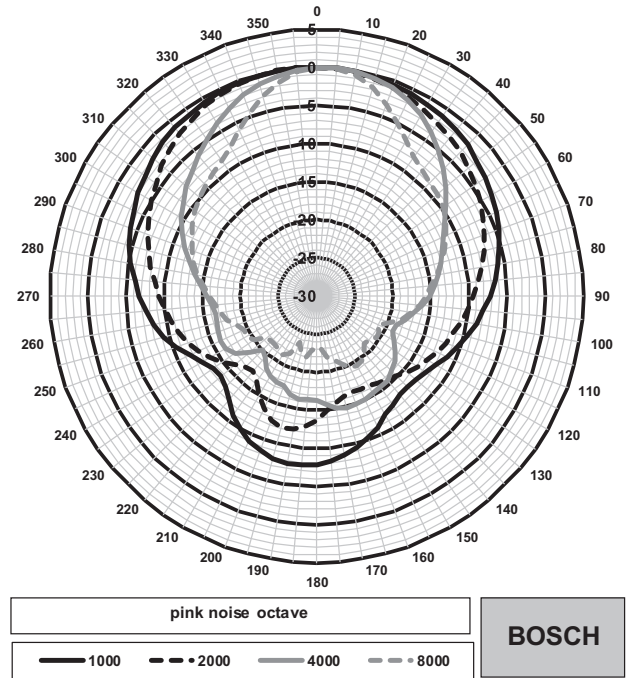

Polar diagram horizontal (high frequency). Normalized at 0 degrees axis.

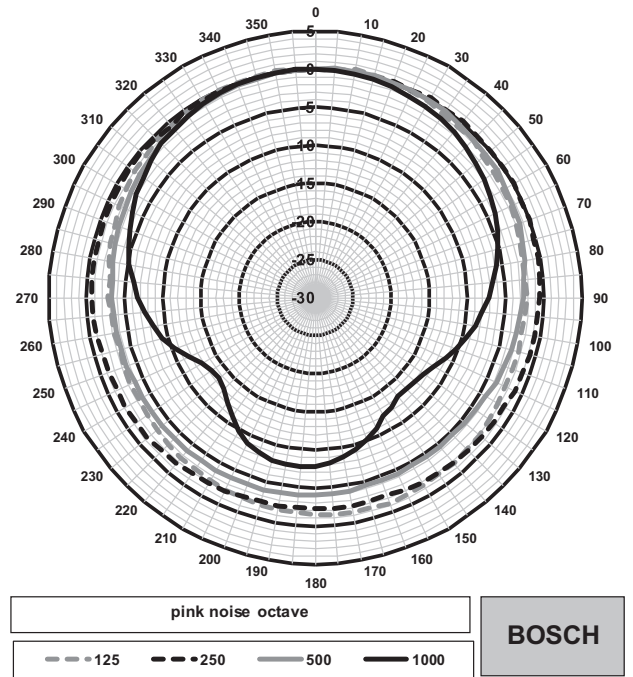

Polar diagram horizontal (low frequency). Normalized at 0 degrees axis.

Parts included

Quantity	Component
1	LB10-UC06-FL Cabinet loudspeaker 6W flat white
1	Installation instruction

**Technical specifications****Electrical\***

Rated power	6 / 3 / 1.5 / 0.75 W
Sound pressure level at 6 W / 1 W (1 m)	99 dB / 91 dB (SPL)
Effective frequency range	145 Hz to 18 kHz (-10 dB)
Opening angle	1 kHz / 4 kHz (-6 dB)
horizontal	168° / 89°
vertical	168° / 89°
Rated input voltage	100 V
Rated impedance	1667 ohm
Connector	4-pole screw terminal block

\* Technical performance data acc. to IEC 60268-5 (half space)

**Mechanical**

Dimensions (H x W x D)	205 mm x 160 mm x 66 mm (7.82 in x 6.07 in x 2.69 in)
Weight	0.83 kg (1.83 lb)
Color	White (RAL 9003)

**Environmental**

Operating temperature	-25 °C to +55°C (-13 °F to +131 °F)
Storage and transport temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative humidity	<95%

**Ordering information****LB10-UC06-FL Cabinet speaker 6W flat white**

Cabinet loudspeaker 6 W, ABS enclosure, finished in white, supplied with mounting brackets for wall or ceiling mounting.

Order number **LB10-UC06-FL**

**Represented by:**

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
emea.securitysystems@bosch.com  
emea.boschsecurity.com

**Germany:**  
Bosch Sicherheitssysteme GmbH  
Robert-Bosch-Ring 5  
85630 Grasbrunn  
Germany  
www.boschsecurity.com

**North America:**  
Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
onlinehelp@us.bosch.com  
www.boschsecurity.us

**Asia-Pacific:**  
Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia