


IUI-SKCU0L-60 SmartKey control unit SE 60, LSN



- ▶ The SE 60 LSNi conventional control unit is programmable via the control panel
- ▶ The SPE blocking element is controlled via the intrusion control panel
- ▶ The SPE blocking element is suitable for various types of doors

The SE 60 LSNi SmartKey blocking unit is used as a mechanical lock for doors.

System overview

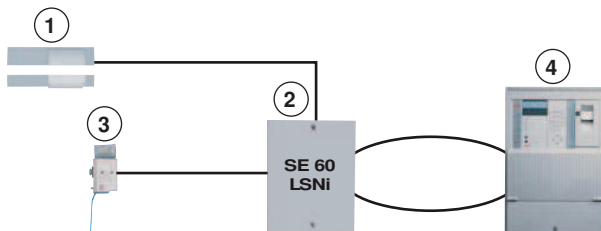

- 1 SPE blocking element
- 2 SE 60 LSNi control unit
- 3 Bolt contact
- 4 LSN control panel

Functions

The SE 60 LSNi control unit controls the SPE blocking element depending on the state of the bolt contact and/or the intrusion control panel. When the door is closed (bolt contact is activated), the bolt of the SPE blocking element is automatically engaged. When the door is unlocked, the bolt is disengaged if the detection area is disarmed. When the detection area is activated, the bolt remains engaged, thus preventing unintended access to the area. If no bolt contact is realized, the bolt of the SPE blocking element is engaged by the activation signal issued by the control panel.

SE 60 LSNi

The SE 60 LSNi control unit processes the status reports of all components in the system, communicates these reports to the intrusion alarm system and controls the SPE blocking element. The control unit has a lock line for connecting bolt contacts and two primary lines for connecting e.g. magnet contacts. The control unit is mounted in the secure area.

SPE blocking element

The SPE blocking element is an additional lock for the door and is intended to prevent unauthorized entry to the armed area. The SPE blocking element must always be mounted in the secure area with a kit to allow it to be fitted out for different door types.

Motorized block function: All blocking elements for an area are engaged and disengaged simultaneously.

A conventional bolt contact should be fitted to the control unit (not part of the scope of delivery).

A conventional standard magnet contact can be connected to the control unit (not part of the scope of delivery).

Regulatory information

| Country | Certification | SE 60 LSNi |
|---------|---------------|------------|
| | | |

| DE | VdS | G 106062, C |
|---------|-------------------------------------|------------------------------|
| Region | Regulatory compliance/quality marks | |
| Europe | CE | SE 60 LSNi |
| | CE | SmartKey |
| Germany | VdS | G 106062 SE 60 LSNi G 106062 |

Installation/configuration notes

i Notice

The SmartKey is fully operational only in conjunction with a blocking element.

The SPE blocking element is always mounted in the secure area with a mounting kit.

If several LSN SmartKey systems need to block simultaneously in one area (motorized block locking function), the control units must be in the same LSN processing assembly (on LVM for UEZ, on NV 120 for UGM).

SE 60 LSNi without bolt contact:

Due to the time shift caused by the LSN, up to four SE 60 LSNi can be activated in 200 ms (not arming time). In general, a bolt contact should be mounted.

Parts included

| Quantity | Component |
|----------|--------------------------------------|
| 1 | SmartKey blocking unit, control unit |

Technical specifications

SE 60 LSNi control unit

| | |
|---|-------------------|
| Operating voltage | 9.6 V to 30 V |
| Total current consumption including blocking element at an input voltage of 9.6 V | |
| • Standby LSN part | 3.53 mA |
| • Standby additional supply | 41 mA |
| • Bolt is engaged | 110 mA for 200 ms |
| • Bolt blocked | 470 mA for 200 ms |
| Total current consumption including blocking element at an input voltage of 28 V | |
| • Standby LSN part | 2.5 mA |
| • Standby additional supply | 30 mA |

| | |
|--------------------------|-------------------|
| • Bolt is engaged | 65 mA for 200 ms |
| • Bolt blocked | 200 mA for 200 ms |
| Environmental conditions | |
| • Environmental class | 2 |
| • Protection category | IP 30 |
| • Operating temperature | -5 °C to +45 °C |
| • Storage temperature | -40 °C to +85 °C |

Housing

| | |
|------------------------|-------------------|
| • Material | ABS |
| • Color | RAL 9002 |
| Dimensions (H x W x D) | 160 x 135 x 35 mm |
| Weight | 0.25 kg |

SPE blocking element

| | |
|-------------------------------------|---|
| Bolt max. distance to locking plate | 4 mm |
| Break force for emergency open | 0.8 to 1 kN |
| Cable to control unit | Max. 6 m, 6-pin, shielded, permanently cast |
| Environmental conditions | |
| • Environmental class | 3 |
| • Protection category | IP 44 |
| • Operating temperature | -25 °C to +55 °C |
| • Storage temperature | -40 °C to +85 °C |

Housing

| | |
|---------------------------|------------------|
| • Material | ABS |
| • Color | RAL 9002 |
| Weight | |
| • Surface mounting models | 0.45 kg |
| • Flush mounting models | 0.40 kg |
| Dimensions (H x W x D) | 28 x 118 x 16 mm |

Ordering information

IUI-SKCU0L-60 SmartKey control unit SE 60, LSN

For mechanically locking doors

Order number **IUI-SKCU0L-60 | F.01U.425.244**

F.01U.523.516

Accessories

4998013609C20 Surface-mount kit for blocking element

Order number **4998013609C20 | 4.998.013.609.C20**

4998021691C20 Blocking element, recess-mount kit

Order number **4998021691C20 | 4.998.021.691.C20**

4998019339C20 Blocking element, glass door mount kit

Order number **4998019339C20 | 4.998.019.339.C20**

4998040607 SE 50 LSN-BLOCKING UNIT

Order number **4998149110**

Represented by:

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands

Germany:

Bosch Sicherheitssysteme GmbH
Robert-Bosch-Platz 1
D-70839 Gerlingen

North America:

Bosch Security Systems, LLC
130 Perinton Parkway
Fairport, New York, 14450, USA

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943